

HPA Automatic Portable Stretch Wrapper

Durability, Reliability & Performance

Features

- 5,000 lb max. capacity
- Precision ring bearing
- Max. load height 80"
- 260% powered film pre-stretch
- Forklift portable from front & rear
- AC/VFD motors reduce maintenance
- Easy load carriage



www.ppipack.com

10 - 6581 Kitimat Road, Mississuaga, Ontario L5N 3T5 Toll Free: 800-665-4040, Tel: 905-507-4040, Fax: 905-285-0054



HPA Automatic Portable Stretch Wrapper

Precision Engineering

is ideal for those customers who...

- Need a higher level of durability than an entry-level turntable machine.
- Want the ability to quickly relocate the machine.
- Want to reduce/eliminate the need for operators to leave their vehicle.
- Want to wrap loads weighing up to 5,000 lbs.

Insta-Thread Film Delivery System



All Flex HPA's are equipped with Insta-Thread[™] film delivery system and film tail treatment mechanism with drop-in film loading for fast, easy and safe threading of film

Precision Ring Bearing

The high profile Flex HPA turntable support is provided by a precision ring bearing for maximum durability and performance.



Drop Lock Carriage Lift System

Packaging

Products



The HPA Flex uses an industrial grade woven belt carriage lift for long service life and reliability. The "drop lock" system prevents carriage movement in the unlikely event of belt breakage

Features

- 15 RPM Variable Speed with "soft-start"
- 5,000 lb Maximum Load Capacity
- Economical 260% Powered Film Pre-Stretch
- Maximum Load Height 80"
- Precision Ring Bearing
- AC/VFD Motors Reduce Maintenance
- Forklift Portable from Front or Rear


Options

- 6,000 lb Capacity
- Tower Extension Wrap up to 110"
- Weigh Scale Package
- 30" Insta-Thread Film Carriage

Technical Data

- Machine Dimensions: 96"L x 48"W x 94.5"H
- Maximum Load Size: 50"L x 50"W x 80"H
- Maximum Load Weight: 5,000 lbs
- Powered Film Pre-Stretch: 260%
- Power Supply: 110V Single Phase 60HZ

Standard Dimensions

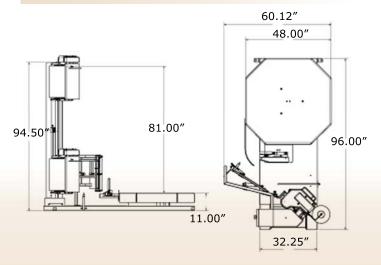



10 - 6581 Kitimat Road, Mississuaga, Ontario L5N 3T5 Toll Free: 800-665-4040, Tel: 905-507-4040, Fax: 905-285-0054